

## Ceiling Speaker (Ground)

 Can be applied to a variety of indoor scenes. The sound is clear and loud, high sensitivity, the motherboard is treated with special coating to protect the circuit board from environmental erosion, and has good high and low temperature resistance, as well as superior insulation, moisture proof, leak proof, dust proof, anti-aging and other characteristics, durable, easy to install.




## **Technical Parameters**

Items	Specification
Input Voltage	100V balanced input
Rated Power	6W/ 3W/ 1.5W
Sound Pressure Level	≥95dB
Effective Frequency Range	80Hz~18kHz±10%
Colour	White (ral 9016)
Size	Ф200*90mm
Certification/Standards	CE certified
Operating Temperature	-25°C~55°C
Storage Temperature	-40°C~70°C



## **Dimension**

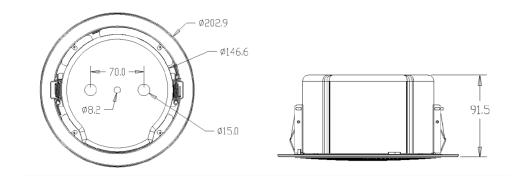

Unit: mm